

# DISPLAY FREEZER (0°F)

## Model: 1FS-GD

### 1-Section Display Freezer with Hinged Glass Door - Shallow Depth

**1FS-GD** - Stainless steel front, aluminum end panels and interior  
**1FS-SA-GD** - Stainless steel exterior, aluminum interior  
**1FS-SS-GD** - Stainless steel exterior and interior  
**Designed to maintain NSF-7 temperatures in 100°F ambient.**



### Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Remote models
Additional epoxy-coated steel shelves	Half glass doors
Chrome or stainless steel shelves	Standard depth
Heavy-duty pilaster strips	Solid door (full or half doors)
Rehinging of door (consult factory)	Special electrical requirements (consult factory)
Adjustable legs	Increased refrigeration system
Digital thermometer	

Consult factory for other model configurations, options and accessories.



**Toll-Free: 800-523-7138**  
 Phone: 215-244-1400  
 Fax: 215-244-9579

539 Dunksferry Road  
 Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

### Standard Model Features

#### REFRIGERATION SYSTEM

Environmentally-safe R-404A refrigerant  
 Self contained, performance-rated refrigeration system  
 Automatic, electric condensate evaporator  
 Thermal expansion valve

#### CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation  
 Chrome-plated handle  
 Cam action, lift off hinges  
 Self-closing door  
 Magnetic snap-in door gasket  
 Cylinder lock in door  
 Heavy-duty, epoxy-coated steel shelves  
 Triple-pane, tempered hinged glass door  
 5" casters

#### MODEL FEATURES

LED interior lighting  
 External dial thermometer  
 Energy saving switch for door heater  
 Automatic electric defrost

APPROVAL:

## Model Specifications

### DIMENSIONAL DATA

Net Capacity (cu. ft.)	16 (453 cu l)
Width, Overall (in.)	26 (660 mm)
Depth, Overall (in.) (incl. handle)	29 1/4 (743 mm)
Depth (in.) (less door)	25 7/8 (657 mm)
Depth (in.) (door open 90°)	49 3/8 (1254 mm)
Clear Door Width (in.)	19 3/8 (492 mm)
Clear Door Height (in.)	58 5/8 (1489 mm)
Height, Overall (in.) (incl. 5" casters)	82 1/4 (2089 mm)
No. of Doors	1
No. of Shelves	4
Shelf Area (sq. ft.)	20.4 (1.9 sq m)

### REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/2
Capacity (BTU/Hr)*	2470

### ELECTRICAL DATA

Voltage (int'l)	115/60/1 (220/50/1)
Feed Wires (incl. ground)	3
Total Amps (int'l)	11.4 (5.3)
Defrost Amps (int'l)	5.2 (2.6)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

### SHIPPING DATA

Height - Crated (in.)	85 1/2 (2172 mm)
Width - Crated (in.)	31 5/8 (803 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	65 (1841 cu l)
Weight Std - Crated (lbs.)	330 (150 kg)
Weight SS - Crated (lbs.)	390 (177 kg)
Weight Std - Uncrated (lbs.)	230 (104 kg)
Weight SS - Uncrated (lbs.)	290 (132 kg)

\* Rating @ -15°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug  
(varies by country)

# Continental

Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunkserry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)



Due to our continued efforts in developing innovative products, specifications subject to change without notice.



MADE IN THE U.S.A.

© Copyright 2014. Continental Refrigerator.  
A Division of National Refrigeration & Air Conditioning Products, Inc.

## Model Plan Views

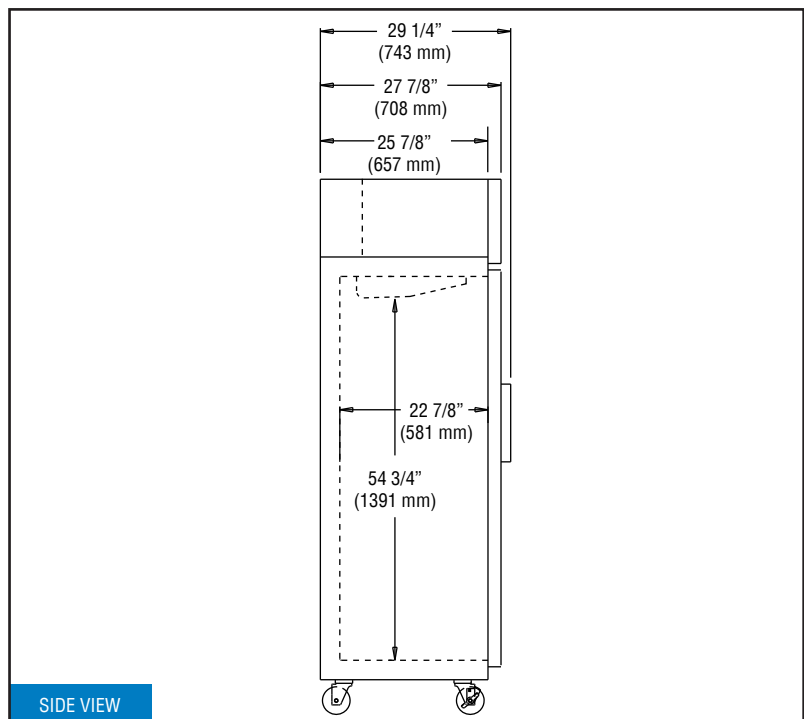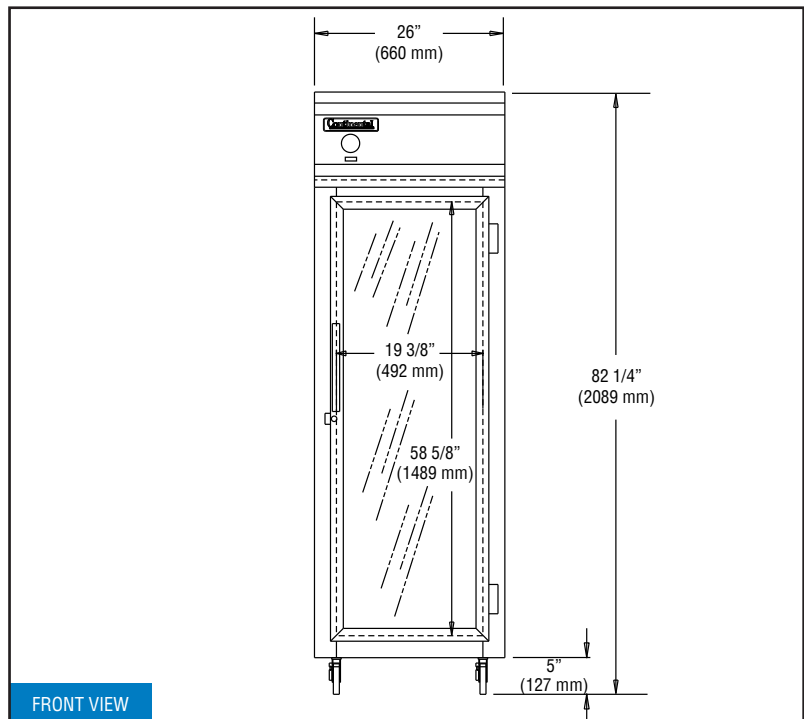

**IMPORTANT NOTE:** If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required.