DISPLAY REFRIGERATOR

Model: 3R-GD

3-Section Display Reach-In Refrigerator with Hinged Glass Doors

3R-GD - Stainless steel front, aluminum end panels and interior
3R-SA-GD - Stainless steel exterior, aluminum interior
3R-SS-GD - Stainless steel exterior and interior
Designed to maintain NSF-7 temperatures in 100°F ambient.

Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Wine display
Add'l epoxy-coated steel shelves	Adjustable legs
Chrome or stainless steel shelves	Half glass doors
Heavy-duty pilaster strips	Pass-thru (consult factory)
Pan slide assemblies	Solid doors (full or half doors)
Rehinging of doors (consult factory)	Increased refrigeration system
Expansion valve system	Special electrical req. (consult factory)

Consult factory for other model configurations, options and accessories.

Project Name:

Model Specified:

Location:

Item No: **Quantity:**

AIA #: **SIS #:**

Standard Model Features

REFRIGERATION SYSTEM

- Environmentally-safe R-134a refrigerant
- Self contained, performance-rated refrigeration system
- Automatic, electric condensate evaporator

CABINET ARCHITECTURE

- 3" non-CFC polyurethane foam insulation
- Chrome-plated handles
- Cam action, lift off hinges
- Self-closing doors
- Magnetic snap-in door gaskets
- Cylinder lock in door
- Heavy-duty, epoxy-coated steel shelves
- Triple-pane, tempered hinged glass doors
- 5" casters

MODEL FEATURES

- LED interior lighting
- Electronic controller w/digital display & hi-low alarm

APPROVAL:

Continental® Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Model Specifications

DIMENSIONAL DATA	
Net Capacity (cu. ft.)	70 (1982 cu l)
Width, Overall (in.)	78 (1981 mm)
Depth, Overall (in.) (incl. handles)	35 3/8 (899 mm)
Depth [less doors] (in.)	32 (813 mm)
Depth [doors open 90°] (in.)	55 1/2 (1410 mm)
Clear Door Width (in.)	19 3/8 (492 mm)
Clear Door Height (in.)	58 5/8 (1489 mm)
Height, Overall (in.) (incl. 5" casters)	85 3/4 (2178 mm
No. of Doors	3
No. of Shelves	12
Shelf Area (sq. ft.)	61.2 (5.7 sq m)
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	3/4
Capacity (BTU/Hr)*	5930
ELECTRICAL DATA	
Voltage (int'l)	115/208-230/60/1 (220/50/1)
Feed Wires (incl. ground)	4
Total Amps (int'l)	12.4 (9.7)
10 ft. Cord/Plug (int'l)	No (No)
SHIPPING DATA	
Height - Crated (in.)	89 (2261 mm)
Width - Crated (in.)	90 (2286 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	187 (5295 cu l)
Weight Std - Crated (lbs.)	740 (336 kg)
Weight SS - Crated (lbs.)	855 (388 kg)
Weight Std - Uncrated (lbs.)	530 (240 kg)
Weight SS - Uncrated (lbs.)	645 (293 kg)

** Rating @ +25°F evaporator, 90°F ambient*
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Model Plan Views

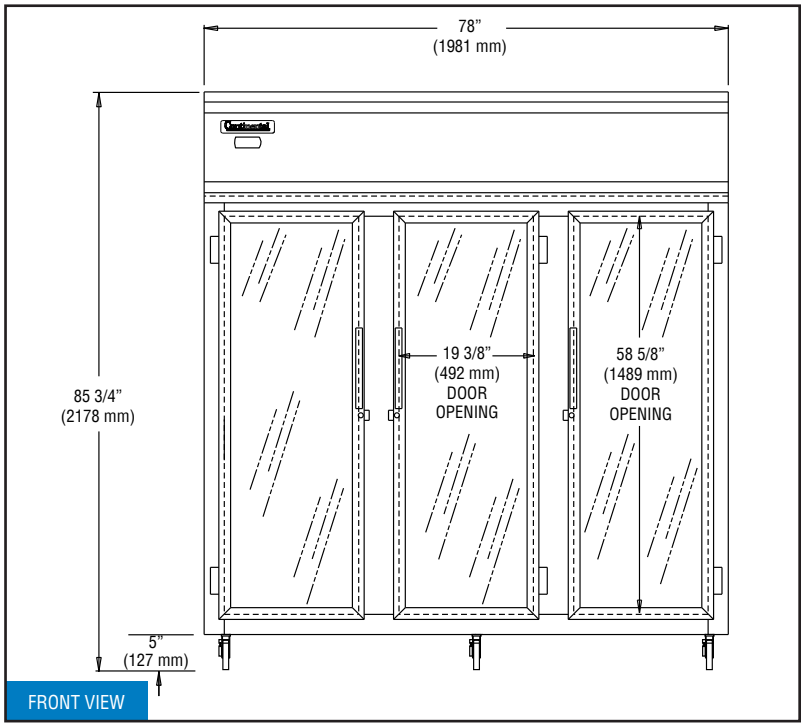

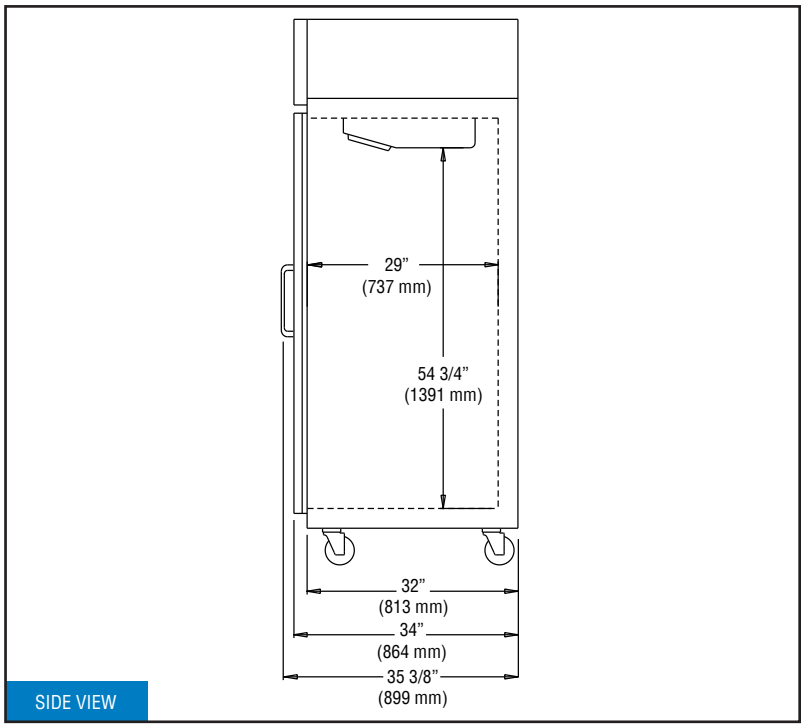

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.

Continental® Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.

Intertek

MADE IN THE U.S.A.

© Copyright 2018. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.