



# Camshelving® Premium Series

## Stationary Starter & Add-On Units 4 or 5 Vented Shelves

| HEIGHT | DEPTHS | LENGTHS |     |
|--------|--------|---------|-----|
| 1      | 3      | 8       |     |
| 84"    | 18"    | 24"     | 48" |
|        | 21"    | 30"     | 54" |
|        | 24"    | 36"     | 60" |
|        |        | 42"     | 72" |

- **Starter Units include:**  
2 factory assembled post kits, 8 or 10 shelf traverses and shelf plates.
  - **Add-On Units include:**  
1 factory assembled post kit, 8 or 10 shelf traverses and shelf plates.
- All 84" high units ship in separate post kits (unassembled) and shelf kits due to overall unit weight.



### Features & Benefits

- Designed for use in high-volume operations with constant loading of heavy products and frequent daily deliveries.
- Use in walk-in coolers, freezers, dry storage, warewashing areas, loading docks or front of the house. Withstands storage temperatures -36° to 190°F (-38° to 88°C). Impervious to moisture, chemicals, salt, food acids and humidity.
- Posts and traverses have a steel core and smooth polypropylene exterior for superior strength and durability. Traverse dovetails are molded into posts.
- Smooth polypropylene shelf plates contain Camguard, an antimicrobial technology that inhibits the growth of mold, fungus and bacteria that may cause odors, stains and product degradation.
- Shelving Units interconnect in straight lines with shared posts. Uniquely engineered Post Connectors offer exceptional cross stabilization. Weight bearing is uncompromised and space is maximized. No add-on clips or "S" hooks required.
- Use corner connectors to add shelves in corners or to install intermediate shelves between 2 starter units. Unique patented design ensures maximum space utilization.
- Posts and traverses wipe clean. Traverses and shelf plates remove easily for cleaning.
- Shelf traverses can be removed and adjusted at 4" (10,2 cm) increments.
- Sturdy reinforced nylon foot adjusts easily to level units.
- Requires some assembly with minimal parts. Use a rubber mallet only.
- Lifetime warranty against rust and corrosion (posts, traverses and shelf plates).
- Available in 1 color – Speckled Gray (480).

Item No. \_\_\_\_\_  
 Quantity \_\_\_\_\_  
 AIA File / Spec No. \_\_\_\_\_  
 Job \_\_\_\_\_




Stationary Starter Unit



Stationary Add-On Unit

## 4 Shelf Unit Weight Bearing Chart

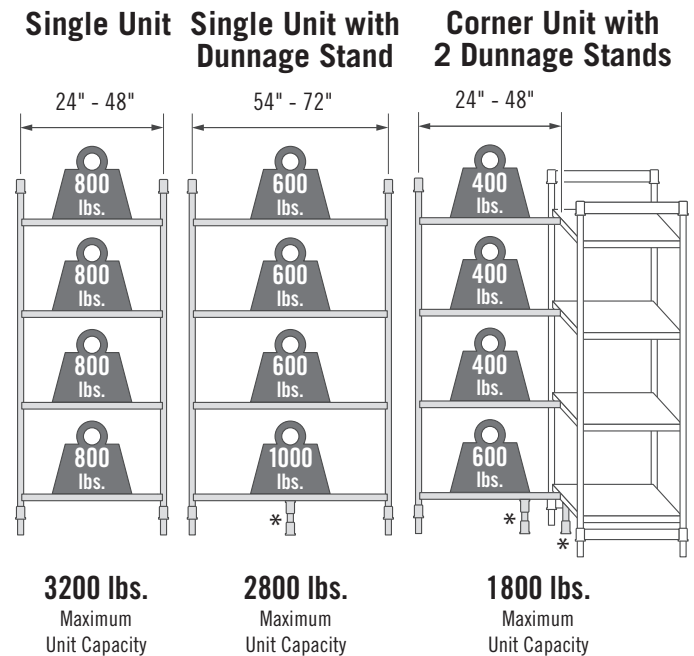

\* Dunnage Stands add stability and increase weight bearing capacity on bottom shelf only. Add to any shelf length. Highly recommended for Starter Units 54" and longer, all Corner Units, U-Shape Units and units specified for heavier loads.

### Approvals



Post Connectors, Corner Connectors, Seismic Foot, Wall Fastener, Identification Tags, Security Cages, Tray Slide Rack, Shelf Rails, Divider Bars, High Density Track and Extension Kits are not NSF Listed.




# Camshelving® Premium Series

## Stationary Starter & Add-On Units 4 or 5 Vented Shelves

**84"**  
HEIGHT

### V4PKG 4-Shelf Vented Units

Starter                      Add-On



**18"**  
DEPTH

| LENGTH | CODE           |
|--------|----------------|
| 24"    | CPU182484V4PKG |
| 30"    | CPU183084V4PKG |
| 36"    | CPU183684V4PKG |
| 42"    | CPU184284V4PKG |
| 48"    | CPU184884V4PKG |
| 54"    | CPU185484V4PKG |
| 60"    | CPU186084V4PKG |
| 72"    | CPU187284V4PKG |

| LENGTH | CODE           |
|--------|----------------|
| 22½"   | CPA182484V4PKG |
| 28½"   | CPA183084V4PKG |
| 34½"   | CPA183684V4PKG |
| 40½"   | CPA184284V4PKG |
| 46½"   | CPA184884V4PKG |
| 52½"   | CPA185484V4PKG |
| 58½"   | CPA186084V4PKG |
| 70½"   | CPA187284V4PKG |

**21"**  
DEPTH

|     |                |
|-----|----------------|
| 24" | CPU212484V4PKG |
| 30" | CPU213084V4PKG |
| 36" | CPU213684V4PKG |
| 42" | CPU214284V4PKG |
| 48" | CPU214884V4PKG |
| 54" | CPU215484V4PKG |
| 60" | CPU216084V4PKG |
| 72" | CPU217284V4PKG |

|      |                |
|------|----------------|
| 22½" | CPA212484V4PKG |
| 28½" | CPA213084V4PKG |
| 34½" | CPA213684V4PKG |
| 40½" | CPA214284V4PKG |
| 46½" | CPA214884V4PKG |
| 52½" | CPA215484V4PKG |
| 58½" | CPA216084V4PKG |
| 70½" | CPA217284V4PKG |

**24"**  
DEPTH

|     |                |
|-----|----------------|
| 24" | CPU242484V4PKG |
| 30" | CPU243084V4PKG |
| 36" | CPU243684V4PKG |
| 42" | CPU244284V4PKG |
| 48" | CPU244884V4PKG |
| 54" | CPU245484V4PKG |
| 60" | CPU246084V4PKG |
| 72" | CPU247284V4PKG |

|      |                |
|------|----------------|
| 22½" | CPA242484V4PKG |
| 28½" | CPA243084V4PKG |
| 34½" | CPA243684V4PKG |
| 40½" | CPA244284V4PKG |
| 46½" | CPA244884V4PKG |
| 52½" | CPA245484V4PKG |
| 58½" | CPA246084V4PKG |
| 70½" | CPA247284V4PKG |

Color: Speckled Gray (480).

### Optional Accessories

- Corner Connector Sets
- Bottom Shelf Dunnage Stands (Low or Tall)
- Shelf Identification Tags
- Wall Fastener
- Seismic Foot
- Shelf Divider Panel
- Shelf Divider Bars (Straight or Angled)
- Shelf Rails (Single or Double)
- Tray Sliding Rack
- Single Shelf Security Cage
- Full Wrap Security Cage
- Shelf Traverses (Single or Double)
- Drying and Storage Cradles

Item No. \_\_\_\_\_



Quantity \_\_\_\_\_

AIA File / Spec No. \_\_\_\_\_

Job \_\_\_\_\_

### V5PKG 5-Shelf Vented Units

Starter                      Add-On



| LENGTH | CODE           |
|--------|----------------|
| 24"    | CPU182484V5PKG |
| 30"    | CPU183084V5PKG |
| 36"    | CPU183684V5PKG |
| 42"    | CPU184284V5PKG |
| 48"    | CPU184884V5PKG |
| 54"    | CPU185484V5PKG |
| 60"    | CPU186084V5PKG |
| 72"    | CPU187284V5PKG |

| LENGTH | CODE           |
|--------|----------------|
| 22½"   | CPA182484V5PKG |
| 28½"   | CPA183084V5PKG |
| 34½"   | CPA183684V5PKG |
| 40½"   | CPA184284V5PKG |
| 46½"   | CPA184884V5PKG |
| 52½"   | CPA185484V5PKG |
| 58½"   | CPA186084V5PKG |
| 70½"   | CPA187284V5PKG |

|     |                |
|-----|----------------|
| 24" | CPU212484V5PKG |
| 30" | CPU213084V5PKG |
| 36" | CPU213684V5PKG |
| 42" | CPU214284V5PKG |
| 48" | CPU214884V5PKG |
| 54" | CPU215484V5PKG |
| 60" | CPU216084V5PKG |
| 72" | CPU217284V5PKG |

|      |                |
|------|----------------|
| 22½" | CPA212484V5PKG |
| 28½" | CPA213084V5PKG |
| 34½" | CPA213684V5PKG |
| 40½" | CPA214284V5PKG |
| 46½" | CPA214884V5PKG |
| 52½" | CPA215484V5PKG |
| 58½" | CPA216084V5PKG |
| 70½" | CPA217284V5PKG |

|     |                |
|-----|----------------|
| 24" | CPU242484V5PKG |
| 30" | CPU243084V5PKG |
| 36" | CPU243684V5PKG |
| 42" | CPU244284V5PKG |
| 48" | CPU244884V5PKG |
| 54" | CPU245484V5PKG |
| 60" | CPU246084V5PKG |
| 72" | CPU247284V5PKG |

|      |                |
|------|----------------|
| 22½" | CPA242484V5PKG |
| 28½" | CPA243084V5PKG |
| 34½" | CPA243684V5PKG |
| 40½" | CPA244284V5PKG |
| 46½" | CPA244884V5PKG |
| 52½" | CPA245484V5PKG |
| 58½" | CPA246084V5PKG |
| 70½" | CPA247284V5PKG |

### Architect Specs

Posts and Traverses: Internal steel core, reinforced polypropylene exterior.  
Post Connectors: Reinforced polypropylene.  
Shelf Plates: Reinforced polypropylene with Camguard™ antimicrobial.  
Corner Connectors: Reinforced nylon.  
Adjustable Foot: Reinforced nylon.

### Approvals



Post Connectors, Corner Connectors, Seismic Foot, Wall Fastener, Identification Tags, Security Cages, Tray Slide Rack, Shelf Rails, Divider Bars, High Density Track and Extension Kits are not NSF Listed.

**CAMBRO**  
TRUSTED FOR GENERATIONS™  
www.cambro.com

Information and specifications are subject to change without notice. Please confirm at time of order.

© Cambro Manufacturing Company 5801 Skylab Road, Huntington Beach, California 92647-2056, U.S.A.

Telephone 714 848 1555 Toll Free 800 854 7631 Customer Service 800 833 3003 Email: customerservice@cambro.com

Printed in USA. REV. 08/16

PS5

D081602