




# BRIDGE TEE TOWERS

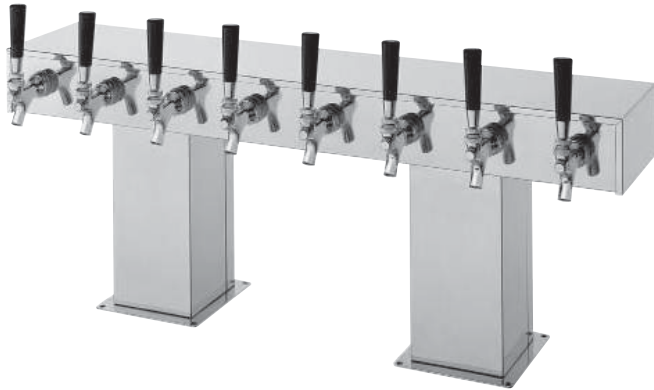

- Pure copper coolant lines and cold block maintain chilled beverage temperature.
- Insulated dispensing head ensures a perfect temperature right up to the faucet.
- Factory-balanced restrictors control beverage flow and assure solid beer from the faucet with every pour.

JOB
AREA
ITEM NO.
MODEL NO.

4006-8B	4006-10B	4006-16B	4006-24B
4006-8B2	4006-10B2	4006-16B2	4006-24B2
4006-8B4	4006-10B4	4006-16B4	4006-24B4
4006-8BPC	4006-10BPC	4006-16BPC	4006-24BPC
4006-8BPC2	4006-10BPC2	4006-16BPC2	4006-24BPC2
4006-8BPC4	4006-10BPC4	4006-16BPC4	4006-24BPC4
4006-8BTF	4006-10BTF	4006-16BTF	4006-24BTF
4006-8BTF2	4006-10BTF2	4006-16BTF2	4006-24BTF2
4006-8BTF4	4006-10BTF4	4006-16BTF4	4006-24BTF4
4006-9B	4006-12B	4006-20B	4006-30B
4006-9B2	4006-12B2	4006-20B2	4006-30B2
4006-9B4	4006-12B4	4006-20B4	4006-30B4
4006-9BPC	4006-12BPC	4006-20BPC	4006-30BPC
4006-9BPC2	4006-12BPC2	4006-20BPC2	4006-30BPC2
4006-9BPC4	4006-12BPC4	4006-20BPC4	4006-30BPC4
4006-9BTF	4006-12BTF	4006-20BTF	4006-30BTF
4006-9BTF2	4006-12BTF2	4006-20BTF2	4006-30BTF2
4006-9BTF4	4006-12BTF4	4006-20BTF4	4006-30BTF4

NUMBER OF FAUCETS		8	9	10	12	16	20	24	30
<b>MODEL NUMBERS</b>	Stainless Steel	<b>4006-8B</b>	<b>4006-9B</b>	<b>4006-10B</b>	<b>4006-12B</b>	<b>4006-16B</b>	<b>4006-20B</b>	<b>4006-24B</b>	<b>4006-30B</b>
	Polished Chrome	<b>4006-8BPC</b>	<b>4006-9BPC</b>	<b>4006-10BPC</b>	<b>4006-12BPC</b>	<b>4006-16BPC</b>	<b>4006-20BPC</b>	<b>4006-24BPC</b>	<b>4006-30BPC</b>
	Tarnish-Free Brass	<b>4006-8BTF</b>	<b>4006-9BTF</b>	<b>4006-10BTF</b>	<b>4006-12BTF</b>	<b>4006-16BTF</b>	<b>4006-20BTF</b>	<b>4006-24BTF</b>	<b>4006-30BTF</b>
Number of Bases		2	2	2	2	2	2	3	3
"A", Length (mm)		33-1/8" (841)	33-1/8" (841)	33-1/8" (841)	33-1/8" (841)	44-1/8" (1121)	55-1/8" (1400)	71-11/16" (1821)	89-9/16" (2275)
Faucet Centers (mm)		4-1/8" (105)	3-1/2" (89)	3" (76)	2-3/4" (70)	2-3/4" (70)	2-3/4" (70)	3" (76)	3" (76)
Center to Center Base Dimension		16-1/2" (419)				22" (559)	27-1/2" (699)	23-7/8" (606)	29-13/16" (758)
"B", Standard Height (mm)		12-15/16" (329)	12-15/16" (329)	12-15/16" (329)	12-15/16" (329)	12-15/16" (329)	12-15/16" (329)	12-15/16" (329)	12-15/16" (329)
<b>Extra high model:</b> To add 2-5/8" to height, add a 2 suffix to model number.		15-9/16" (395)	15-9/16" (395)	15-9/16" (395)	15-9/16" (395)	15-9/16" (395)	15-9/16" (395)	15-9/16" (395)	15-9/16" (395)
<b>Extra high model:</b> To add 3-3/4" to height, add a 4 suffix to model number.		16-11/16" (424)	16-11/16" (424)	16-11/16" (424)	16-11/16" (424)	16-11/16" (424)	16-11/16" (424)	16-11/16" (424)	16-11/16" (424)
Shipping Weight, Lbs. (kg)		46 (20)	48 (21)	50 (22)	54 (24)	60 (27)	66 (29)	72 (32)	78 (35)
Optional Drip Pan	Top Mount - 5020 Series	5030*	5030*	5030*	5030*	5034*	5036*	5124* (2)	5130* (2)
	Top Mount - C18000 Series	C18655A*	C18655A*	C18655A*	C18655A*	C18660	C18665	n/a	n/a
	Recessed	58979*	58979*	58979*	58979*	69324	69327	n/a	n/a

\* Add "TF" to Drip Pan model number for Tarnish-Free Brass finish.



**Available options:**

- For NSF Approved Tee Towers, add a "N" suffix to model number
- Faucet locks

Form No. 95152  
Rev. 06.18.2013



**BRIDGE TEE TOWERS**

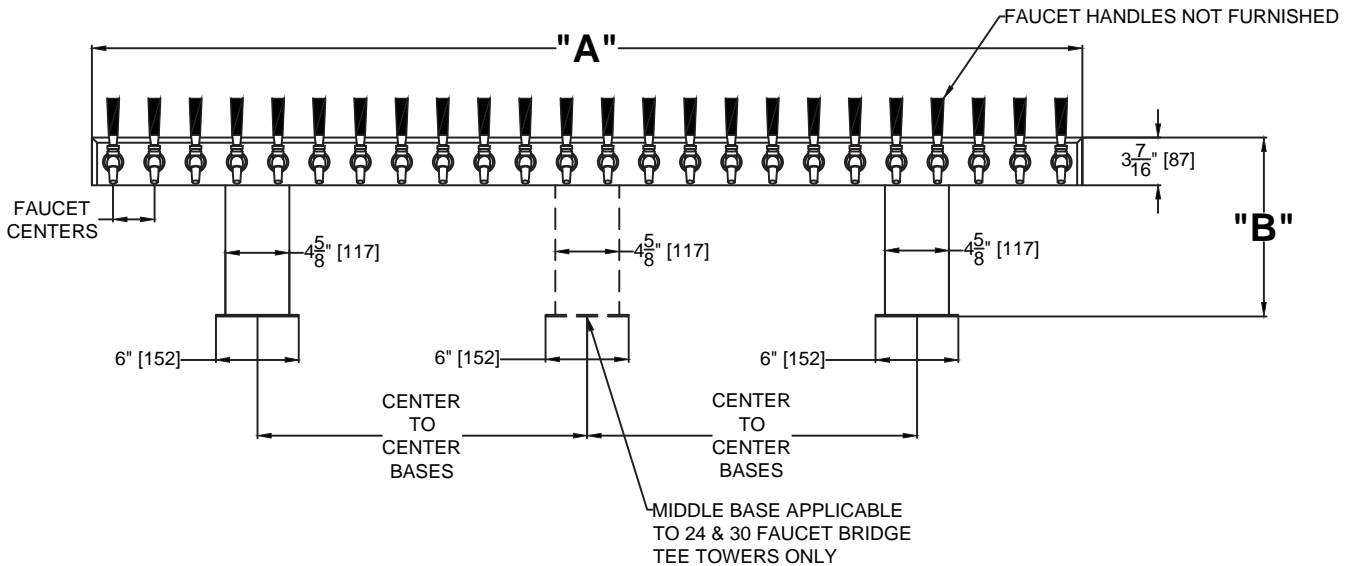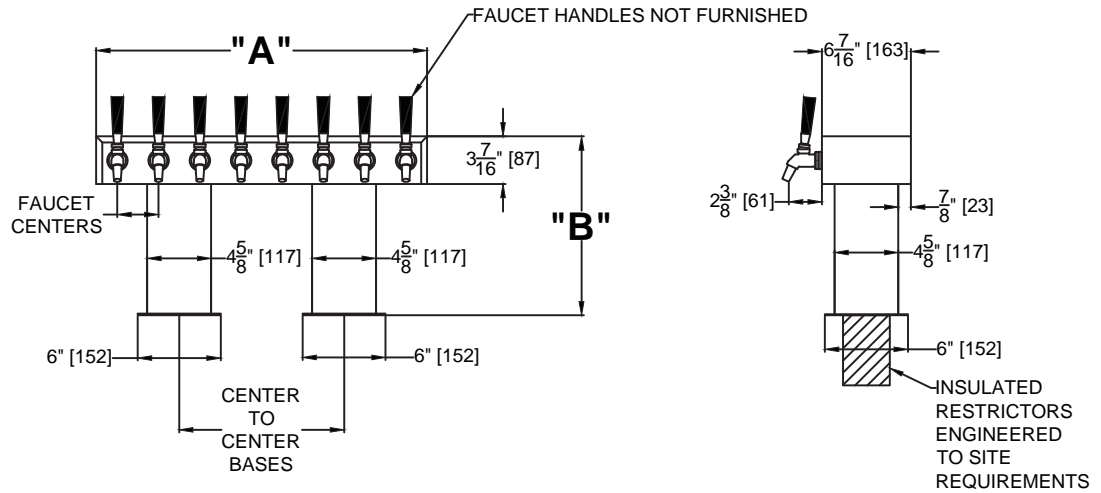

**BRIDGE TEE TOWERS**